

TOE JACKS


5.5, 11 & 27.5 Ton

GET UNDER EQUIPMENT WITH ONLY 1 1/16" OF GROUND CLEARANCE.


- With lifting points on the toe and on the top, these extremely rugged jacks are ideal for machine lifting, rigging, lift truck service and much more.
- Choose from 5.5-ton, 11-ton, and now, an amazing 27.5-ton lifting capacity jack.
- All jacks operate both vertically and horizontally.
- Base, toe and pumping assembly swivel independently, allowing the jack to work in confined areas.



Meets ASME B30.1 standard

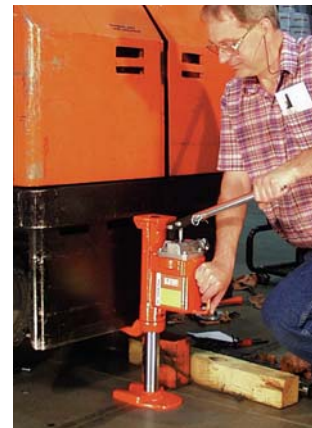

The J Series Toe Jack is an extremely rugged jack used here for lift truck service.

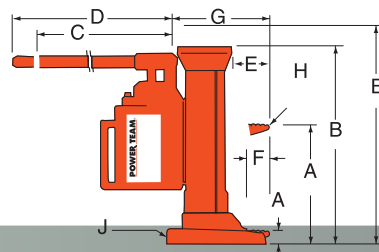

DIMENSIONS

Order Number	Ret. (in.)	Ext. (in.)	Ret. (in.)	Ext. (in.)	C (in.)	D (in.)	E (in.)	F (in.)	G (in.)	H (in.)	J (in.)
J58T	1 1/16	9 3/8	14 3/4	23	14 1/2	17 3/4	2 13/16	2 3/16	6 15/16	1 5/8	5 1/8
J109T	1 1/16	10 3/8	16 1/2	25 3/4	14 1/2	17 3/4	3	2 3/16	7 7/32	2 1/2	6 3/4
J259T	2 1/8	11 3/8	19 7/8	29 1/16	8 1/4	29 3/4	5 3/4	4	10 1/2	3 1/2	10 5/8

ORDERING INFORMATION*

Cap. Tons	Max Lift Stroke	Order Number	Strokes to Extend Piston 1 in.	Handle Effort at Max Load (lbs.)	Carry Handle	Product Wt. (lbs.)
5 1/2	8 1/4	J58T	8	83.9	Yes	43
11	9 1/4	J109T	13	88	Yes	64
27 1/2	9 9/16	J259T	21	88	Yes	203

*See current price list for shipping weights.

JACKS