

▼ Shown: LW-16 with SB-2 and optional LWB-1



## LW Series

Minimum Clearance:

**.39 inches**

Maximum Lift Height:

**2.02\*-2.72\* inches**

Maximum Force:

**16 tons**

Maximum Operating Pressure:

**10,000 psi**



### ER-Series Load Skates

In combination with the Enerpac Lifting Wedge we recommend Load Skates for moving heavy loads.

Page: 170



### Split-Flow Manifolds


Split Flow Valves to control two or four lifting wedges simultaneously.

AM-21 with 3 ports 3/8" NPTF.


AM-41 with 5 ports 3/8" NPTF.

Page: 118

- Requires .39 inch access gap
- Lifting force 16 ton at 10,000 psi hydraulic pressure
- Automatic mechanical retraction (single acting)
- Securely raises or lowers 16 tons with no slippage
- Lifting wedge LW-16 includes safety block SB-2
- Use in tandem to lift 32 tons, or 64 tons
- .83 inch of vertical lift from each step (maximum lift to 2.72 inches with optional LWB-1 stepped block)



### ▲ Optional LWB-1 Stepped Block

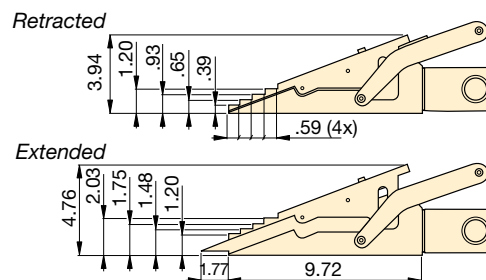

### LW-16

Max. Lifting Force (ton)	Model No.	Minimum Clearance Gap (in)	Max. Lift per Stage (in)	Max. Lifting Height (in)	Max. Lifting Height Using Stepped Block (in)	Oil Capacity (in <sup>3</sup> )	Weight (lbs)
16	LW-16	.39	.83	2.02	2.72	4.75	15.4

\*Use optional stepped block LWB-1 to increase wedge lifting height 1.18 inches.

▼ For lifting heavy equipment with minimum floor clearance the LW-16 is the ideal tool.

