

▼ Shown: PGM-2408R



## PGM Series

Reservoir Capacity:  
**1-2 gallons**

Flow at Rated Pressure:  
**40 in<sup>3</sup>/min.**

Motor Size:  
**4.2 Ft.lbs**

Maximum Operating Pressure:  
**10,000 psi**



### Gauges

Minimize the risk of overloading and ensure long, dependable service from your equipment. Refer to the

System Components section for a full range of gauges.

Page: 113





### Hoses

Enerpac offers a complete line of high-quality hydraulic hoses. To ensure the integrity of your system,

specify only genuine Enerpac hydraulic hoses.

Page: 114

- **Patented Genesis Technology**
  - coaxial piston design ensures high performance
  - first-stage piston pump for improved efficiency
- **High by-pass pressures improve productivity**
- **All Atlas pumps feature sturdy roll cage for use in tough environments**
- **Four-cycle Honda motor**

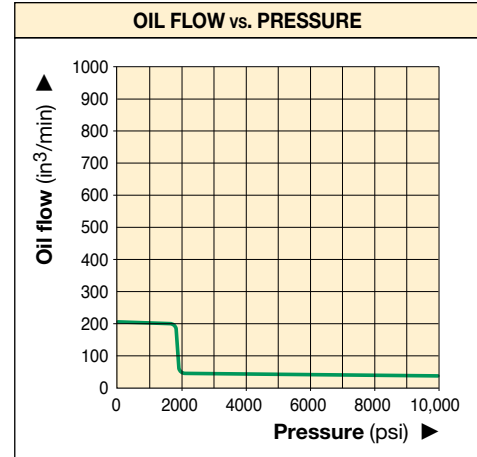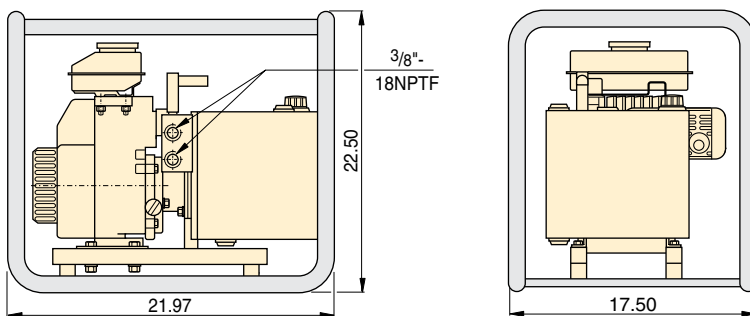

Used with Cylinder	Usable Oil Capacity (gal)	Model Number	Output Flow Rate** (in <sup>3</sup> /min)		Pressure Rating (psi)	Valve Type	Valve Function	Motor Manufacturer	Motor Size (Ft.lbs)	Weight (lbs)
			1 <sup>st</sup> stage	2 <sup>nd</sup> stage						
Single-acting	1.0	PGM-2304R*	200	40	10,000	3-way, 3-position	Advance/ Hold/Retract	Honda	4.2 at 3600 rpm	55
	2.0	PGM-2308R*	200	40	10,000	3-way, 3-position				72
Double-acting	1.0	PGM-2404R*	200	40	10,000	4-way, 3-position				55
	2.0	PGM-2408R*	200	40	10,000	4-way, 3-position				72

\* Note: PGM-20 Series are available with a carrying handle instead of a Roll Cage. For ordering omit the 'R' from the model number.

\*\* Nominal values—may vary based on motor speed.